

## 433 MHz Rolling Code Remote Controls

84330AML – Single-function rolling code remote control  
84335AML – 3-function rolling code mini remote control

Can be used with all MOTORLIFT & compatible Chamberlain Garage Door Openers sold in Australia and New Zealand.

Chamberlain do not recomend or endorse this accessory's use with products other than Chamberlain.



## 433 MHz Rolling Code Remote Controls

84330AML – Single-function rolling code remote control  
84335AML – 3-function rolling code mini remote control

Can be used with all MOTORLIFT & compatible Chamberlain Garage Door Openers sold in Australia and New Zealand.

Chamberlain do not recomend or endorse this accessory's use with products other than Chamberlain.



**DO NOT operate your garage door unless it is in full view and clear of obstruction and properly adjusted. No one should enter or leave garage whilst door is in motion. Do not allow children to operate push button(s) or remote. Do not allow children to play near door.**

### Set Receiver to Match Remote Control Code

1. **Figure 1.** Press and hold the selected remote control push button (1).
2. **ML750, ML700, MLR500, MLR750, HE60R, CR550, HANDYLIFT & HANDYLIFT PLUS**

Press and release the orange "Learn" button (2) on the opener panel. The opener light will flash once. Release the remote push button.

### ML500 & HE60

Press and release the program button on the side of the unit (4). The green LED will glow steadily for 30 seconds. Release the button when the motor unit light blinks. It has learned the code. If no lightbulb is not installed, two clicks will be heard.

Now the opener will operate when the remote push button is pressed.

**If you release the remote control push button before the opener light flashes, the opener has not accepted the code.**

### To Erase All Programmed Codes

**ML750, ML700, MLR500, MLR750, HE60R, CR550, HANDYLIFT & HANDYLIFT PLUS**

Press and hold the "Learn" button (2) on the opener panel until the green indicator light alongside (3) turns off (approx. 6 seconds).

### ML500 & HE60

Press and hold the program button (4) on motor unit until the learn indicator light goes out (approx. seconds).

**Note: This procedure erases all codes from the operators memory.**

• To reprogram valid remotes into your opener, follow the procedure layed out in Steps 1 and 2 above.

The lithium batteries should produce power for up to 5 years. To replace batteries, use the visor clip or screwdriver blade to pry open the case, as shown **Figure 2.** ("Open" location is stamped on back.)

Model 84330AML: Insert batteries positive side **up**.

Model 84335AML: Insert batteries positive side **down**.

To replace cover, snap shut along both sides.



**DO NOT operate your garage door unless it is in full view and clear of obstruction and properly adjusted. No one should enter or leave garage whilst door is in motion. Do not allow children to operate push button(s) or remote. Do not allow children to play near door.**

### Set Receiver to Match Remote Control Code

1. **Figure 1.** Press and hold the selected remote control push button (1).
2. **ML750, ML700, MLR500, MLR750, HE60R, CR550, HANDYLIFT & HANDYLIFT PLUS**

Press and release the orange "Learn" button (2) on the opener panel. The opener light will flash once. Release the remote push button.

### ML500 & HE60

Press and release the program button on the side of the unit (4). The green LED will glow steadily for 30 seconds. Release the button when the motor unit light blinks. It has learned the code. If no lightbulb is not installed, two clicks will be heard.

Now the opener will operate when the remote push button is pressed.

**If you release the remote control push button before the opener light flashes, the opener has not accepted the code.**

### To Erase All Programmed Codes

**ML750, ML700, MLR500, MLR750, HE60R, CR550, HANDYLIFT & HANDYLIFT PLUS**

Press and hold the "Learn" button (2) on the opener panel until the green indicator light alongside (3) turns off (approx. 6 seconds).

### ML500 & HE60

Press and hold the program button (4) on motor unit until the learn indicator light goes out (approx. seconds).

**Note: This procedure erases all codes from the operators memory.**





• To reprogram valid remotes into your opener, follow the procedure layed out in Steps 1 and 2 above.

The lithium batteries should produce power for up to 5 years. To replace batteries, use the visor clip or screwdriver blade to pry open the case, as shown **Figure 2.** ("Open" location is stamped on back.)

Model 84330AML: Insert batteries positive side **up**.

Model 84335AML: Insert batteries positive side **down**.

To replace cover, snap shut along both sides.

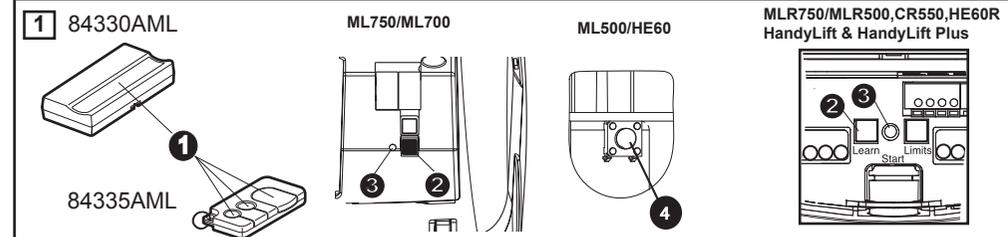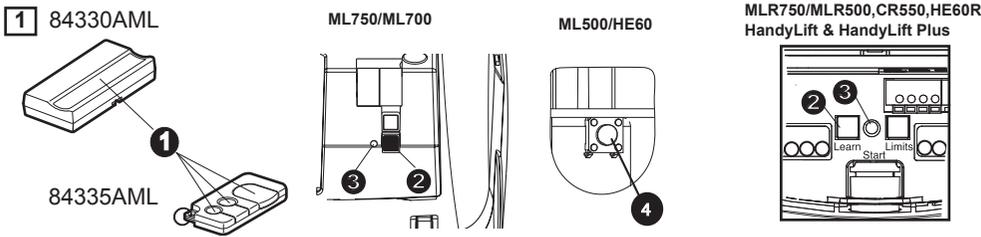

## ONE YEAR LIMITED WARRANTY

Chamberlain Australia Pty Limited / Chamberlain New Zealand (Chamberlain), the manufacturer of Chamberlain® automatic garage door openers, warrants to the original consumer purchaser of this product that it is free from defect in materials and/or workmanship for a period of 1 year from the date of purchase.

Chamberlain is committed to manufacturing and supplying high quality goods. As part of this commitment, we seek to provide reliable service and support for our goods and are pleased to provide you, the original purchaser, with this Chamberlain Limited Warranty.

The benefits given to you under this Chamberlain Limited Warranty are in addition to any rights and remedies that you may have under Australian or New Zealand consumer protection laws. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law, or New Zealand Consumer Guarantees Act 1993. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Chamberlain Australia Pty Ltd  
PO Box 1446  
Lane Cove NSW 1595  
1800 665 438  
chamberlaindiy.com.au

Chamberlain New Zealand Ltd  
P.O. Box 100221  
North Shore 0745  
0800 653 667  
chamberlaindiy.co.nz

114A3450B

© 2015 The Chamberlain Group, Inc  
All rights reserved

## ONE YEAR LIMITED WARRANTY

Chamberlain Australia Pty Limited / Chamberlain New Zealand (Chamberlain), the manufacturer of Chamberlain® automatic garage door openers, warrants to the original consumer purchaser of this product that it is free from defect in materials and/or workmanship for a period of 1 year from the date of purchase.

Chamberlain is committed to manufacturing and supplying high quality goods. As part of this commitment, we seek to provide reliable service and support for our goods and are pleased to provide you, the original purchaser, with this Chamberlain Limited Warranty.

The benefits given to you under this Chamberlain Limited Warranty are in addition to any rights and remedies that you may have under Australian or New Zealand consumer protection laws. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law, or New Zealand Consumer Guarantees Act 1993. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Chamberlain Australia Pty Ltd  
PO Box 1446  
Lane Cove NSW 1595  
1800 665 438  
chamberlaindiy.com.au

Chamberlain New Zealand Ltd  
P.O. Box 100221  
North Shore 0745  
0800 653 667  
chamberlaindiy.co.nz

114A3450B

© 2015 The Chamberlain Group, Inc  
All rights reserved