
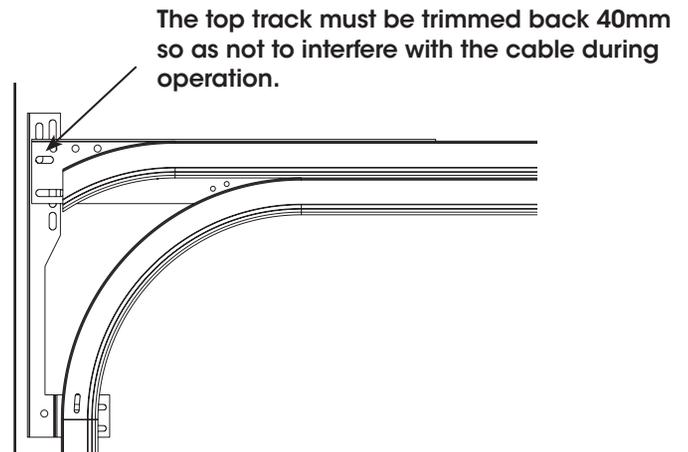


# Front Mounted Low Headroom Double Track



## installation instructions

Twin track front mount low head room will enable the door to be fitted into 200mm for manual operation or plus 50mm if an opener is to be fitted. **It should be noted that the standard parts box may not include all the parts required for this installation method.**

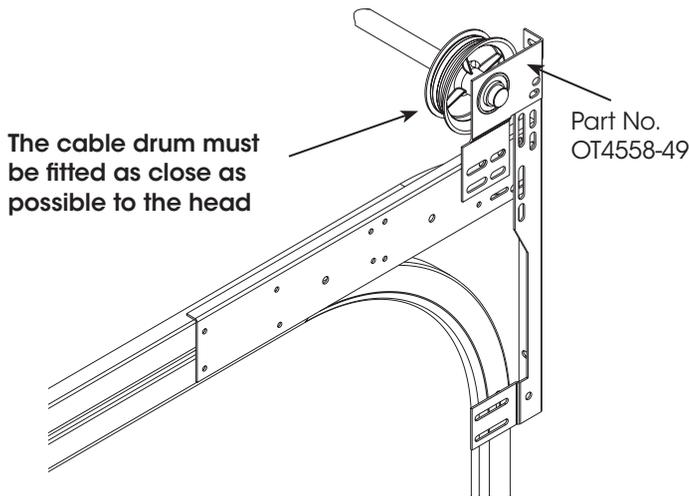


### PARTS REQUIRED

- 1 x L/h end bearing bkt OT4558
- 1 x R/h end bearing bkt OT4559
- 2 x Top hangars OT4543
- Cables door height + 400mm

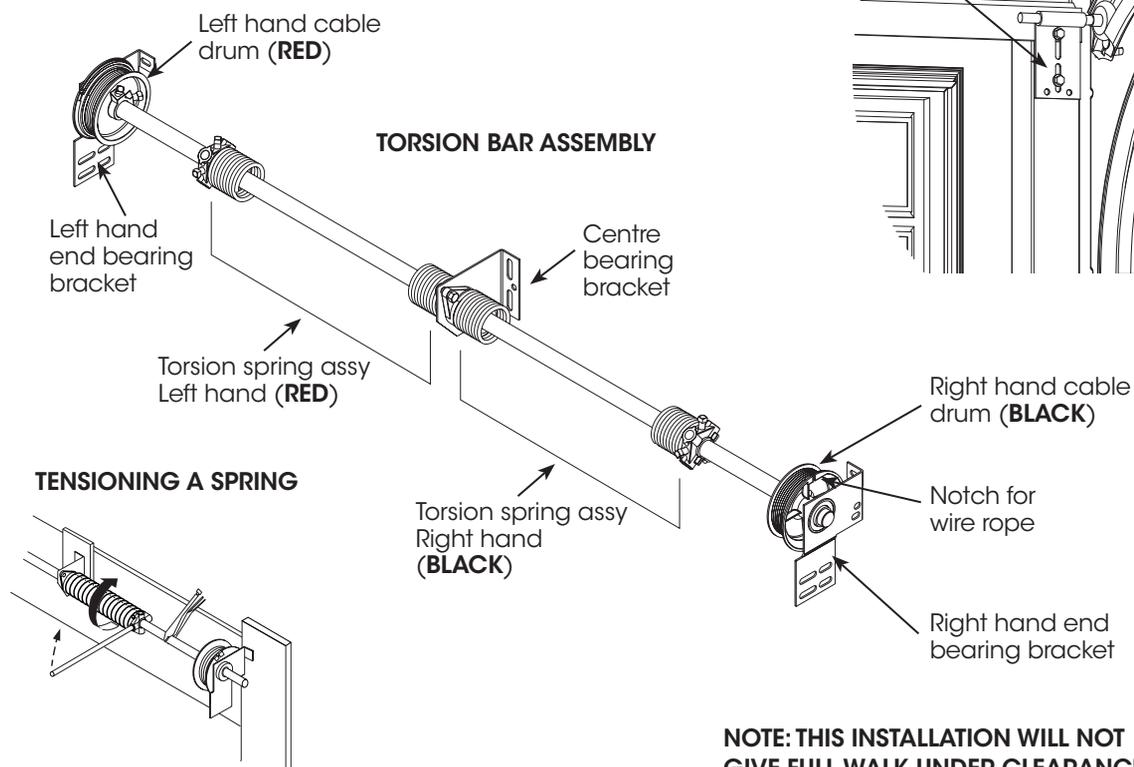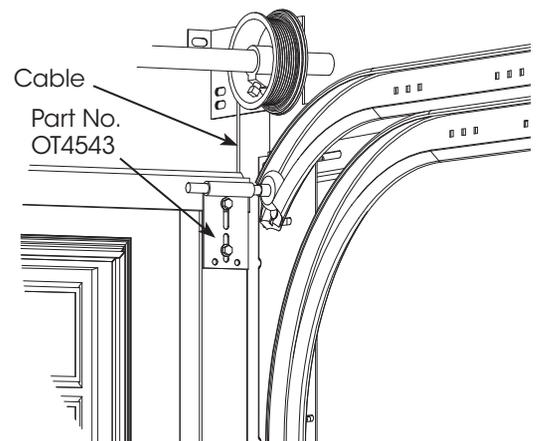

### TENSIONING A SPRING

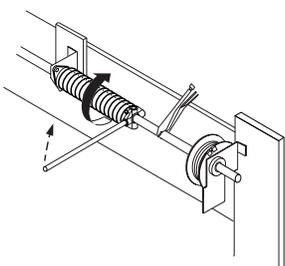

**NOTE: THIS INSTALLATION WILL NOT GIVE FULL WALK UNDER CLEARANCE.**